


Vertical blinds -K 01, K 01 Lux, EOS, Vogue


89 MM / 127 MM

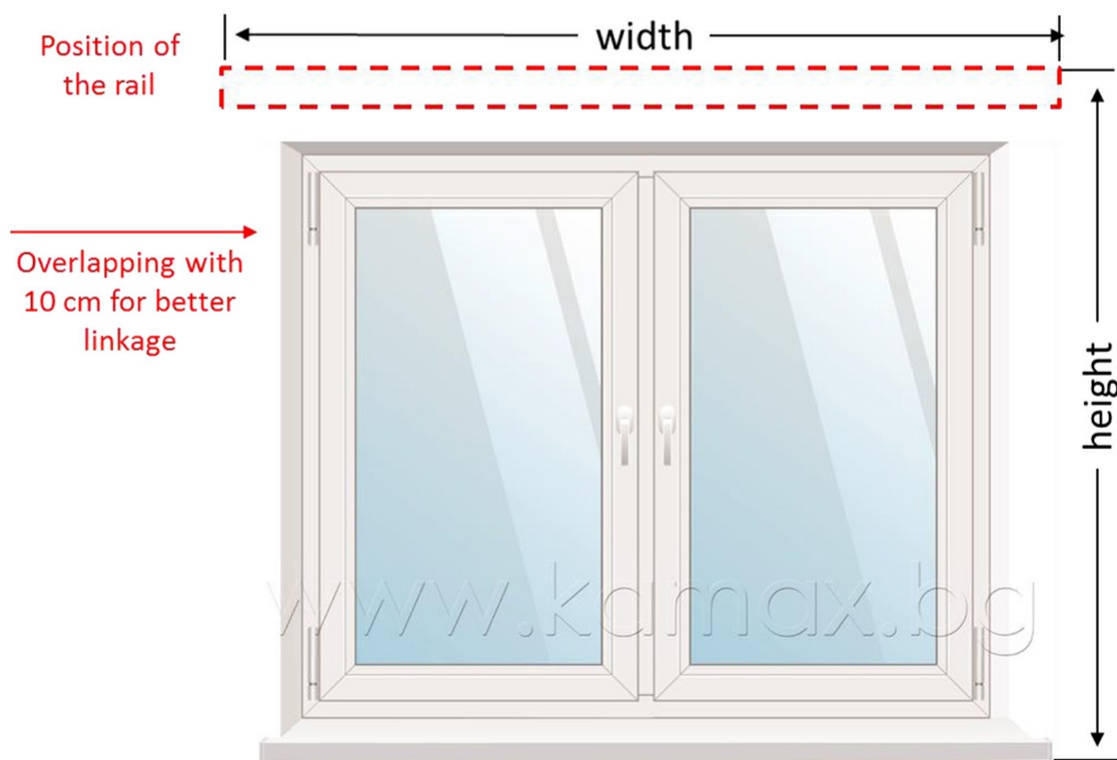

Installation in front of the window

1. How to define the width – measure precisely the width of the window in the upper and bottom part, take the larger of the two values and add at least 10cm to each side. For control schemes 1 and 2 it is recommended adding at least 15cm.

2. How to define the height – measure precisely the height from the place where you will install the rail of the blinds to the window sill and subtract 2cm. If there is no window sill measure to the place where you want the blinds to drop. The rail has to be installed at least 7 cm over the edge of the joinery.
3. Control of the blinds – define the control scheme (depending how it is viewed from the room).
4. Way of installation – define whether the installation will be to the wall or to the ceiling.

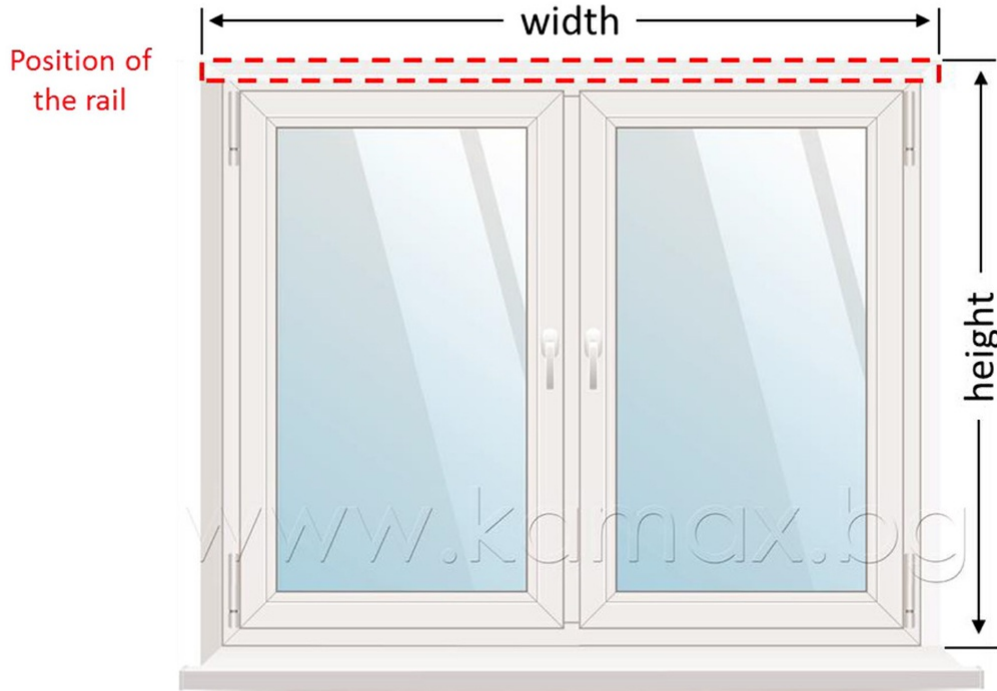

Installation in niche

1. How to define the width – measure precisely the width of the window (or the distance between the two walls) in the upper and bottom part, take the smaller of the two values and subtract 2.0 cm.
2. How to define the height – measure precisely the height from the place where you will install the rail of the blinds to the window sill and subtract 2cm. If there is no window sill measure to the place where you want the blinds to drop. The rail has to be installed at least 7 cm over the edge of the joinery.
3. Control of the blinds – define the control scheme (depending how it is viewed from the room)
4. Way of installation – define whether the installation will be to the wall or to the ceiling.