




How to measure



© 05/2019

ROMAN SHADES MODEL AURA

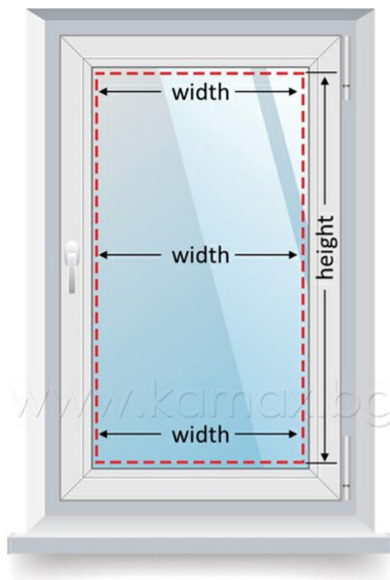

Installation with overlapping the joinery


1. How to define the width – measure precisely the width of the glass together with the glass holders, the upper, medium and bottom part of the window with accuracy to mm, take the largest of the three values.
2. How to define the height – measure precisely the height of the glass together with the glass holders in the left and right part of the window with accuracy to mm, take the larger of the two values and subtract 1.0 cm.
3. Control of the blinds – you define whether to be left or right (depending how it is viewed from the room). It is recommended for the control to be on the side of the hinges.


Installation in front of the window

1. How to define the width – measure precisely the width of the window in upper and bottom part, take the larger of the two values and add from 3.0 to 7.0 cm to each side.
2. How to define the height – measure the height from the place where you will install the upper profile of the blinds to the window sill and subtract 2.0 cm. If there is no window sill, measure to the place where you want the blinds to drop.

Position of the profile


Overlapping with 3 cm to 7 cm for better linkage

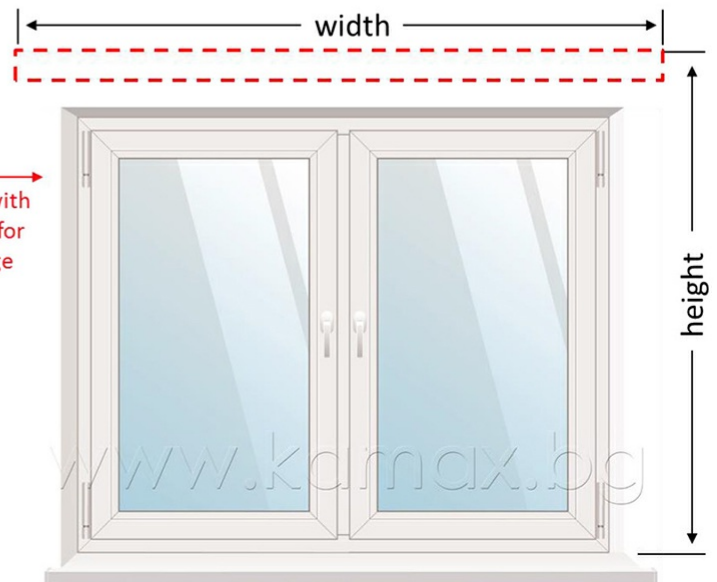




3. Control of the blinds – you define whether to be left or right (depending how it is viewed from the room).

ROMAN SHADES ELEGANTE MODELS A010, BB10, BB15, BB24,

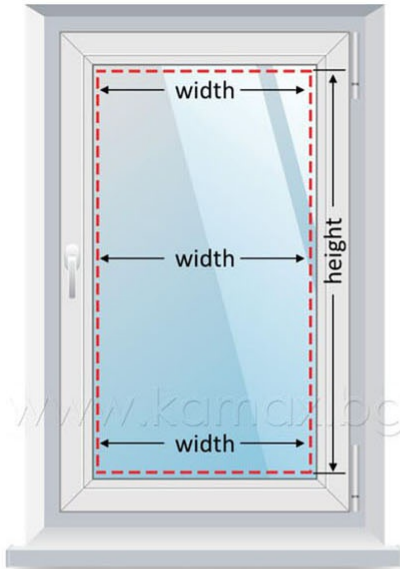

Installation between glass holders (tightly to the glass)

1. How to define the width – measure precisely the width between the glass holders in the upper, medium and bottom part of the window with accuracy to mm, take the smallest of the three values and subtract 0.2 cm.
2. How to define the height – measure precisely the height of the glass in the left and right part of the window with accuracy to mm, take the smaller of the two values.
3. Control of the blinds – you define whether to be left or right (depending how it is viewed from the room). It is recommended for the control to be on the side of the hinges.

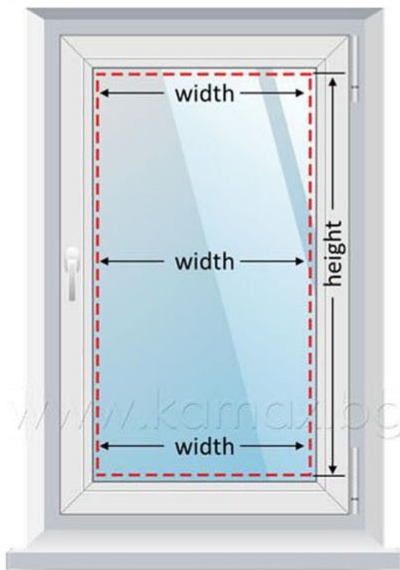

Installation with overlapping the joinery

1. How to define the width – measure precisely the width of the glass together with the glass holders, the upper, medium and bottom part of the window with accuracy to mm, take the largest of the three values.
2. How to define the height – measure precisely the height of the glass with the glass holders in the upper and bottom part of the window with accuracy to mm.
3. Control of the blinds – you define whether to be left or right (depending how it is viewed from the room). It is recommended for the control to be on the side of the hinges.